


### Overview

**HP recommends  
Windows Vista® Business**

#### Microtower

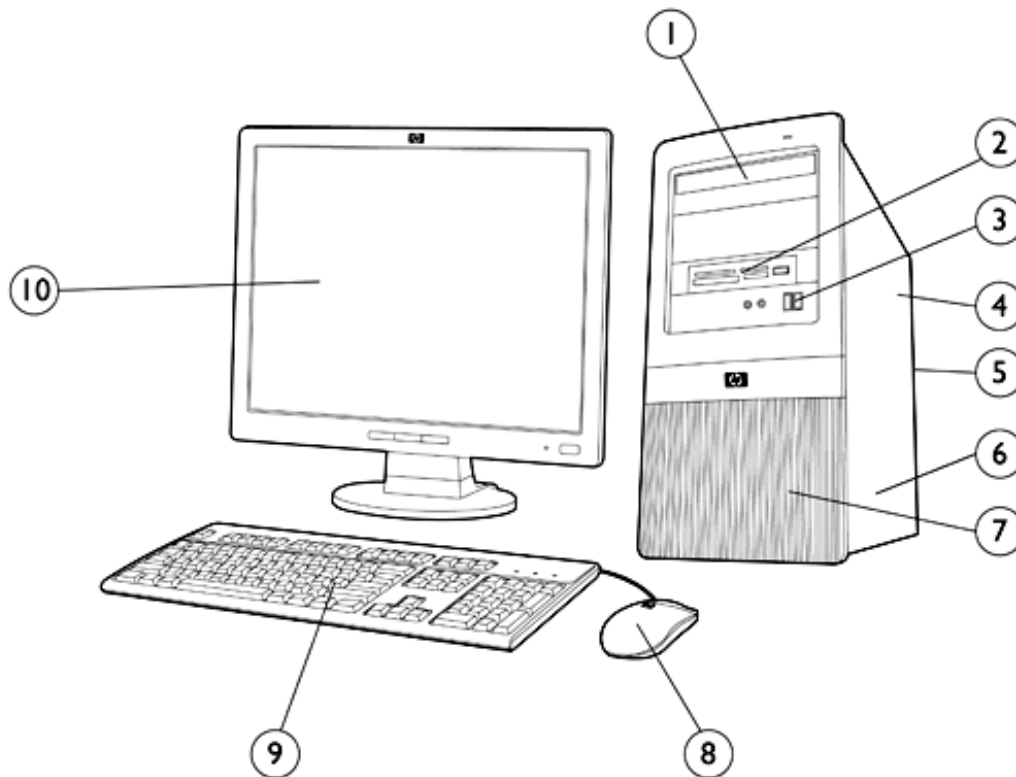

- |  |   |
|--|---|
| 1. (2) external 5.25" drive bays for optional optical drives                               | 6. (1) full-height PCI 2.3 slot, (2) PCIe x1 slots, (1) PCIe x16 slot |
| 2. (1) external 3.5" drive bay for optional media reader or diskette drive                 | 7. (2) internal 3.5" drive bays                                       |
| 3. (2) USB 2.0 ports, audio ports  | 8. PS/2 Scroll Mouse  |
| 4. 250-watt max power supply   | 9. HP Standard Keyboard   |
| 5. (4) USB 2.0 ports, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in – (1) audio out – (1) MIC | 10. Monitor (sold separately)   |

### Overview

#### At A Glance

- Intel® Core™ 2 processors, Intel Pentium® processors, or Intel Celeron® processors
- Choice of operating systems:
  - Genuine Windows Vista Business 32
  - Genuine Windows Vista Home Premium
  - Genuine Windows Vista Home Basic 32
  - Redflag Linux (China Only)
  - FreeDOS
- Intel G31 Express Chipset
- Intel I/O Controller Hub 7 (ICH7)
- Intel Graphics Media Accelerator
- PCI and PCI Express I/O buses
- Serial ATA controller
- USB 2.0 support
- Realtek RTL8101E 10/100 Fast Ethernet controller
- Choice of hard drives and optical drives
- DDR2 SDRAM system memory
- Protected by HP Services. Terms and conditions vary by country. Certain restrictions and exclusions apply.

\* RAID mode not supported

### Standard Features and Configurable Components

#### Processor and Speed

One of the following

#### Intel Celeron Processors

Intel Celeron 420 Processor (1.60-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 430 Processor (1.80-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 440 Processor (2.00-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 450 Processor (2.2-GHz, 512K L2 cache, 800-MHz FSB)

#### Intel Celeron Dual-Core Processors

Intel Celeron Dual Core E1200 Processor (1.60-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron Dual Core E1500 Processor (2.2-GHz, 512K L2 cache, 800-MHz FSB)

Intel Celeron E1600 Processor (2.4-GHz, 512K L2 cache, 800-MHz FSB)

#### Intel Pentium Dual-Core Processors

Intel Pentium Dual-Core E2140 Processor (1.60-GHz, 1-MB L2 cache, 800-MHz FSB)

Intel Pentium Dual-Core E2160 Processor (1.80-GHz, 1-MB L2 cache, 800-MHz FSB)

Intel Pentium Dual-Core E2200 Processor (2.2-GHz, 1-MB L2 cache, 800-MHz FSB)

Intel Pentium Dual Core E5200 processor (2.50 GHz, 2 MB L2 cache, 800 MHz FSB)

Intel Pentium Dual Core E5300 Processor (2.6-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium Dual Core E5300 (HE) Processor (2.6-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium Dual Core E5400 Processor (2.70-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium E6300 Processor (2.80-GHz, 2MB L2 cache, 800-MHz FSB)

#### Intel Core 2 Duo Processors

Intel Core 2 Duo E4500 Processor (2.20-GHz, 2-MB L2 cache, 800-MHz FSB)

Intel Core 2 Duo E4600 Processor (2.40-GHz, 2-MB L2 cache, 800-MHz FSB)

Intel Core 2 Duo E4700 Processor (2.60-GHz, 2-MB L2 cache, 800-MHz FSB)

Intel Core 2 Duo E7300 Processor (2.66-GHz, 3-MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7400 Processor (2.80-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7500 Processor (2.93-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7500 (HE) Processor (2.93-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7600 Processor (3.06-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E8200 Processor (2.66-GHz, 6-MB L2 cache, 1333-MHz FSB)

Intel Core 2 Duo E8300 Processor (2.83-GHz, 6 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Duo E8400 Processor (3.00-GHz, 6-MB L2 cache, 1333MHz FSB)

Intel Core 2 Duo E8500 Processor (3.16-GHz, 6-MB L2 cache, 1333-MHz FSB)

Intel Core 2 Duo E8600 processor (3.33 GHz, 6 MB L2 cache, 1333-MHz FSB)

**NOTE:** Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

### Standard Features and Configurable Components

#### Operating Systems and Application Software

(availability varies by region)

Genuine Windows Vista Business 32\*  
Genuine Windows Vista Home Premium  
Genuine Windows Vista Home Basic 32\*  
RedFlag Linux (China Only)  
Free DOS

\* Certain Windows Vista product features require advanced or additional hardware. See <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspix> and <http://www.microsoft.com/windowsvista/getready/capable.mspix> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <http://www.windowsvista.com/upgradeadvisor>

Microsoft Office 2007 Basic  
Microsoft Office 2007 Small Business  
Microsoft Office 2007 Professional  
Microsoft Works 8.5  
HP Power Manager 2.0  
Roxio Easy Media Creator 9.x\*\*  
Intervideo WinDVD Player 5.x\*\*  
Sun Java Runtime Environment  
Firefox-HP Virtual Browser

\*\* Supporting software available with certain optical drive configurations

---

#### Hard Drives

80-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
160-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
250-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
320-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)  
500-GB Serial ATA 3.0-Gb/s Hard Drive (7200 rpm)

---

#### System Memory

512-MB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 512MB)  
1-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 1GB)  
2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 1GB)  
2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 2GB)  
4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 2GB)

---

### Standard Features and Configurable Components

**Storage –**

One or more of the following (see Storage section below)

**Diskette Drive**

1.44-MB Diskette Drive

**Media Reader**

HP 16-in-1 Media Reader and additional USB 2.0 port

HP 22-in-1 Media Card Reader

HP 22-in-1 Media Card Reader with 1394 port

**Optical Drives (Serial ATA)**

SATA DVD-ROM Drive

SATA CD-RW/DVD-ROM Combo Drive

SATA SuperMulti LightScribe DVD Writer Drive

---

**Input Devices****Keyboard – One of the following**

HP PS/2 Standard Keyboard

HP USB Standard Keyboard

HP USB Smartcard Keyboard

**Mouse – One of the following**

PS/2 2-Button Optical Scroll Mouse

USB 2-Button Optical Scroll Mouse

USB 2-Button Laser Mouse

---

**Audio**

Realtek ALC662 High Definition audio codec

3D audio compliant and HD Audio compatible

---

**Communication**

Integrated Realtek 8101E 10/100 Ethernet Controller

Intel Gigabit CT Desktop NIC

Intel PRO/1000 PT Gigabit PCIe Controller (full height) – optional

Agere 56K PCI Modem – optional

LSI PCIe x1 Hi-Speed 56K International SoftModem – optional

HP Wireless A+G PCI Card (full height)

HP Wireless 802.11 b/g/n PCIe Card

---

### Standard Features and Configurable Components

#### Graphics

Intel Graphics Media Accelerator – integrated

NVIDIA GeForce 8400 GS (256MB) Single Head PCIe x16 – optional\*

NVIDIA GeForce GT130 768MB PCIe x16

HP ADD2 SDVO PCIe x16 DVI-D Adapter – optional

ATI Radeon HD 2400XT (256MB DH) PCIe x16 – optional

ATI Radeon 3470 256MB Single Head graphics adapter (PCIe x16)

ATI Radeon HD 4550 Dual Head PCIe x16

ATI Radeon HD 4650 1 GB PCIe x16

HP DisplayPort to VGA Adapter

HP DisplayPort To DVI-D Adapter

\* 1GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.

---

#### Miscellaneous

HP FireWire / IEEE 1394 PCI Card (full height)

HP Serial/Parallel PCI Card (full height)

### System Details

#### Base Unit

- Micro ATX microtower chassis, including power supply and front bezel
- Five (5) drive bays and four expansion slots
- Microsoft operating system CD – optional
- Active type heatsink
- 92 x 92 x 25 mm chassis fan
- System board with Intel G31 Express chipset, Intel I/O Controller Hub 7 (ICH7), Realtek RTL8101E 10/100 Ethernet controller, Intel GMA graphics, and Realtek audio, (1) full-height PCI 2.3 slot, (2) PCI Express x1 slots, (1) PCI Express x16 slot, (2) DDR2 DIMM memory slots, (4) Serial ATA data connectors
- Product documentation on CD
- HP system restore CD – optional
- Power cord

#### Slots

##### PCI

One (1) full-height PCI 2.3 slot on PCA  
Two (2) full-height PCI Express x1 slots on PCA  
One (1) full-height PCI Express x16 slot on PCA (for graphic cards)

##### Memory Expansion

Two (2) DDR2 SDRAM DIMM slots (4 GB maximum memory support)

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

#### Bays

##### Internal

Two (2) 3.5"

##### External

Two (2) 5.25"  
One (1) 3.5"

#### USB Support

EHCI high-speed USB 2.0 controller  
Two (2) front ports; Four (4) rear ports, Two (2) internal ports on motherboard

#### Interfaces (Legacy)

One (1) PS/2 keyboard port  
One (1) PS/2 mouse port  
One (1) analog VGA video port  
One (1) line in; one (1) line out; one (1) mic in  
One (1) RJ45 network port

### System Details

<b>Weight &amp; Dimensions</b>	<b>Chassis Dimensions</b> (H x W x D)	15.16 x 7.28 x 16.38 in. with bezel (385 x 185 x 416 mm) 14.88 x 6.50 x 16.10 in. without bezel (378 x 165 x 409 mm)
	<b>Packaged Dimensions</b> (L x W x H)	19.13 x 21.875 x 10.13 in 490 x 556 x 257 mm
	<b>System Weight</b>	22.4 lb (10.2 kg)
	<b>Shipping Weight</b>	30.8 lb (14.0 kg)

<b>Technology and Features</b>	<b>Memory Type</b>	PC2-6400 DDR2 SDRAM (800MHz) non-ECC Up to 4-GB maximum system memory supported
	<b>NOTE:</b> For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.	
	<b>Hard Drive Interfaces Supported</b>	Serial ATA

<b>Chassis</b>	<b>Front Panel</b>	Power button Power On LED HDD Activity LED
	<b>Cooling Solutions Supported</b>	Power Supply Fan (variable speed) Active heatsink (variable speed) Chassis fan
	<b>Slots Supported</b>	Four (4) full-height expansion slots
	<b>Front I/O</b>	Two (2) USB 2.0 ports
	<b>Rear I/O</b>	Standard Micro ATX I/O connectors, including four (4) USB 2.0 ports
	<b>Drive Bays</b>	Two (2) 5-1/4" external One (1) 3-1/2" external Two (2) 3-1/2" internal
	<b>Internal Speaker</b>	N/A
	<b>Security</b>	Padlock loop Kensington Lock Support Support for chassis padlocks and cable lock devices Optional USB Port Disable at factory (user configurable via BIOS)
	<b>Power Supply</b>	250-watt ATX Power Supply – PFC/non-PFC with a 115v/230v line switch (varies by country/region)



### System Details

#### Unit Environment and Operating Conditions

#### General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 4 in (10.2 cm) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

<b>Temperature Range</b>	<b>Operating</b>	50° to 95° F (10° to 35° C)
	<b>Non-operating</b>	-22° to 140° F (-30° to 60° C)
<b>Relative Humidity</b>	<b>Operating</b>	10% to 90% (non-condensing at ambient)
	<b>Non-operating</b>	5% to 95% (non-condensing at ambient)
<b>Maximum Altitude</b> (unpressurized)	<b>Operating</b>	10,000 ft (3048 m)
	<b>Non-operating</b>	30,000 ft (9000 m)

**NOTE:** Operating temperature is de-rated 1.0 deg C per 1000 ft (300 m) to 10,000 ft (3000 m) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

#### System Board

<b>Processor</b>	Socket T; LGA775 industry standard Micro ATX form factor Support single Intel Core 2 Duo, Celeron 4xx or Dual Core
<b>PWM</b>	ISL6312 – 3 Phase
<b>Chipset</b>	Intel G31 Express Intel I/O Controller Hub 7 (ICH7)
<b>Super I/O</b>	Fintek F71882FG
<b>Front Side Bus Frequency</b>	800/1066/1333 MHz
<b>Memory</b>	DDR2 SDRAM 2 x DIMM slots
<b>Clock Generator</b>	RTM 876-665
<b>Integrated Graphics</b>	Intel Graphics Media Accelerator (GMA)
<b>Audio</b>	Realtek ALC662 HD Audio compatible codec with two channel audio 3D audio
<b>LOM</b>	Realtek RTL8101E 10/100 Fast Ethernet controller
<b>Storage</b>	Four Serial ATA interfaces
<b>Expansion Slots</b>	1 x PCI 2.3 slot 2 x PCI Express x1 slots 1 x PCI Express x16 slot
<b>BIOS</b>	SPI EEPROM
<b>Industrial Standard</b>	PCI 2.3 compliant USB 2.0

### System Details

<b>Rear Side I/O Ports</b>	1 x PS/2 keyboard port 1 x PS/2 mouse port 4 x USB 2.0 ports 1 x RJ-45 10/100 port 1 x D-sub 15 pin analog VGA port 3 x audio ports
<b>On Board I/O Interfaces</b>	1 x ATX power connector 1 x +12V power connector 1 x Floppy connector 1 x Front panel connector, Switch, LED (ON/Flash/OFF) 2 x Fan headers for CPU, chassis, with voltage/fan speed control 1 x header to support 2 USB 2.0 ports at front side 1 x header to support 2 front (Headphone/Mic) audio ports 1 x header to support USB media reader
<b>Board Size</b>	Micro-ATX, PCB Size: 9.6 x 8.5 in (24.38 x 21.86 cm) 4-layer PCB with green color
<b>Additional Features</b>	<ul style="list-style-type: none"> <li>• Bootable without keyboard, mouse or monitor</li> <li>• Keyboard/mouse/USB wake up</li> <li>• Support S1, S3, S4 and S5</li> <li>• ACPI status</li> <li>• Hardware monitor capability</li> <li>• CPU fan speed control</li> </ul>

<b>Network Interface</b>	<b>Integrated Realtek 8101E 10/100 Fast Ethernet Controller</b>	<b>Hardware Highlights Features</b>	PCIe x1 interface 10-Mbps and 100-Mbps operation Crossover detection and auto-correction Wake-on-Lan and remote Wake-up (Wake-on-LAN supported from S1, S3, S4 only. Not supported from S5)
	<b>Intel PRO/1000 PT Gigabit PCIe Adapter</b>	<b>Hardware Highlights Features</b>	PCI Express interface 10-Mbps, 100-Mbps and 1000-Mbps operation (Wake-on-LAN supported from S1, S3, S4 only. Not supported from S5)

<b>Wireless</b>	Wireless A+G PCI Card (full height bracket)
-----------------	---

### System Details

#### Power Supply

- ATX Power Supply – Passive PFC/non-PFC with a 115v/230v line switch
- Passive Power Factor Correction (PFC) – with line switch set to 230V – No PFC in 115V line switch position
- 90 to 140VAC, or 180 to 264VAC operating voltage range
- 100 to 127VAC, or 200 to 240VAC rated voltage range
- 50-60 Hz rated line frequency
- 47-63 Hz operating line frequency range
- 250 watt maximum rated power
- 80-mm power supply fan – variable speed for optimum acoustics

#### Power Conservation

##### 'Energy Saver'

- APM 1.2 support
- Screen blanking
- Hard drive 'Idle' mode
- System Idle mode
- ~2 watt power consumption in ES mode – suspend to RAM (S3) (instantly available PC)
- Processor/Cache memory power-down (S3)

#### System Environmental Specs

- Values are subject to change without notification and are for reference only.
- Performance of system, options, and ancillary equipment will vary depending on the system configuration.
- Levels presented do not account for non-HP/Compaq installed hardware.

##### Ambient Air Temperature Operating

50° to 95°F (10° to 35°C) at sea level with an altitude de-rating of 1.0°C per every 1000 ft (300 m) above sea level to a maximum of 8000 ft (2500 m), no direct sustained sunlight. Maximum rate of change is 77°F/Hr (25°C/Hr). The upper limit may be limited by the type and number of options installed.

##### Storage

-22° to 140°F (-30° to 60°C) – Maximum rate of change: 410°F/Hr (210°C/Hr).

##### Humidity

##### Operating

10% to 90% relative humidity (Rh), 86°F (30°C) maximum wet bulb temperature, non-condensing

##### Storage

10% to 95% relative humidity (Rh), 101.66°F (38.7°C) maximum wet bulb temperature, non-condensing

##### Altitude

##### Operating

0 to 10,000 feet (0 to 3048 meters) – This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1,000 ft/min (304.8 m/min).

##### Non-Operating

0 to 30,000 feet (0 to 9,144 meters) – Maximum allowable altitude change rate is 1200 ft/min (365.76 m/min).

##### Shock

Listed are the levels of shock the product can withstand with NO damage being incurred. The values represent peak input acceleration during a 2 to 3 ms half-sine shock pulse, 11 ms trapezoidal shock pulse.

##### Non-Operating

35G's (Half-sine Shock)  
35G's (Trapezoidal Shock)

### System Details

#### Vibration

Listed are the levels of vibration the product can withstand with NO damage being incurred. The values represent a flat random vibration input acceleration profile across the given frequency range.

##### Operating

Random vibration at 5Hz@0.00025G<sup>2</sup>/Hz, 10Hz@0.01G<sup>2</sup>/Hz, 100Hz@0.01G<sup>2</sup>/Hz, 300Hz@0.00001G<sup>2</sup>/Hz  
5Hz to 300Hz, (0.25G's nominal).

##### Non-Operating

Random vibration at 0.008G<sup>2</sup>/Hz, 10Hz to 500Hz, (2 Grms nominal).

#### Acoustic Noise

Listed are the declared A-WEIGHTED SOUND POWER LEVELS (LWAd) and declared average desktop seated operator position A-WEIGHTED SOUND PRESSURE LEVELS (LpAm) when the product is operating in a 73.4°F (23°C) ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

**IDLE** (Fixed disk drive spinning)

LWAd = 4.3 Bels,  
Desktop Average LpAm = 32dBA

**FIXED DISK** (Random write)

LWAd = 4.8 Bels,  
Desktop Average LpAm = 37dBA

**CD-ROM** (Sequential Reads)

LWAd = 5.0 Bels,  
Deskside Average LpAm = 39dBA

### Service and Support

On-site Warranty<sup>Note 1</sup>: One-year (1-1-1) limited warranty delivers one year of on-site, next business-day<sup>Note 2</sup> service for parts and labor and includes free telephone support<sup>Note 3</sup> 24 x 7. Global coverage<sup>Note 2</sup> ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. One-year onsite and labor are not available in all countries.

**NOTE 1:** Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region

**NOTE 2:** On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

**NOTE 3:** Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

### After-Market Options

#### Communications

##### NICs

Intel Gigabit CT Desktop NIC	FH969AA
Intel PRO/1000 PT Gigabit PCIe Controller (full height)	EH352AA

##### Wireless LAN

HP Wireless A+G PCI Card (North America only)	EA118AA
HP Wireless A+G PCI Card (WW except North America)	PZ928AA
HP Wireless 802.11 b/g/n PCIe Card	FH971AA

##### Modems

Agere 2006 PCI High-Speed 56K International SoftModem	EK694AA
LSI PCIe x1 Hi-Speed 56K International SoftModem	FH970AA

#### Hard Disk Drives

HP 500-GB SATA 3.0-Gb/s Hard Drive	PV943A
HP 320-GB SATA 3.0-Gb/s Hard Drive	FH963AA
HP 250-GB SATA 3.0-Gb/s Hard Drive	PY278AA
HP 160-GB SATA 3.0-Gb/s Hard Drive	PY277AA
HP 80-GB SATA 3.0-Gb/s Hard Drive	PY276AA

#### Removable Storage Devices

##### Diskette Drive

HP 1.44-MB Internal Diskette Drive	AH053AA
HP 1.44-MB USB Diskette Drive – External	DC141B
HP 16-in-1 Media Reader	EM718AA
HP 22-in-1 Media Card Reader	FX273AA
HP 22-in-1 Media Card Reader with 1394 port	KN518AA

#### Input Devices

HP PS/2 Standard Keyboard	DT527A
HP USB Standard Keyboard	DT528A
HP 2.4 GHz Wireless Keyboard and Mouse	NB896AA#xxx
HP USB 2-Button Laser Mouse	GW405AA
HP PS/2 2-Button Optical Scroll Mouse	EY703AA
HP USB 2-Button Optical Scroll Mouse	DC172B

#### Memory

HP 2-GB PC2-6400 (DDR2-800 MHz) DIMM	AH060AA
HP 1-GB PC2-6400 (DDR2-800 MHz) DIMM	AH058AA
HP 512-MB PC2-6400 (DDR2-800 MHz) DIMM	AH056AA

#### Audio

HP Satellite Speakers	ZD929AA
-----------------------	---------



### After-Market Options

<b>Graphics</b>	NVIDIA GeForce 8400 GS 256MB SH PCIe x16 Graphics Card*	GJ119AA
	NVIDIA GeForce GT130 768MB PCIe x16	AR957AA
	ATI Radeon HD 2400XT 256MB DH PCIe x16 Graphics Card	KD060AA
	ATI Radeon 3470 256MB SH PCIe x16	FH972AA
	ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card	AT042AA
	ATI Radeon HD 4650 1GB PCIe x16	AR956AA
	HP DisplayPort To DVI-D Adapter	FH973AA
	HP DisplayPort to VGA Adapter	AS615AA
	HP ADD2 SDVO DVI-D Adapter	DY674A
* 1GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.		

<b>Optical Drives</b>	HP SATA CD-RW/DVD-ROM Combo Drive	AH046AA
	HP SATA DVD-ROM Drive	AH047AA
	HP SATA SuperMulti LightScribe DVD Writer Drive	GF343AA

<b>Security</b>	HP Business PC Security Lock Kit	PV606AA
	HP USB Smart Card Keyboard	ED707AA

<b>Miscellaneous Accessories</b>	HP FireWire / IEEE 1394 PCI Card	PA997A
----------------------------------	----------------------------------	--------

<b>Monitors*</b>	<b>CRTs</b>	
	HP s7540 17" (16.0" vis) CRT Monitor	PF997AA#XXX
	HP v7650 17" (16.0" vis) Flat-face CRT Monitor	PF996AA#XXX
	<b>TFTs</b>	
	HP L1506 15" TFT Flat Panel Monitor – Analog only	PX848AA#XXX
	HP L1706 17" TFT Flat Panel Monitor – Analog only	PX849AA#XXX
	HP L1740 17" TFT Flat Panel Display – Analog/Digital	PL766AA#XXX
	HP L1755 17" TFT Flat Panel Display – Analog/Digital	PL777AA#XXX
	HP L1906 19" TFT Flat Panel Display – Analog only	PX850AA#XXX
	HP L1940T 19" TFT Flat Panel Display – Analog/Digital	EM869AA#XXX
	HP L1955 19" TFT Flat Panel Display – Analog/Digital	PD974AA#XXX
	HP L2065 20" TFT Flat Panel Display – Analog/Digital	EF227A4#XXX
	HP LP2465 24" TFT Widescreen Flat Panel Display – Analog/Digital	EF224A4#XXX
	<b>GSA Monitors</b>	
	HP L717g 17" GSA Flat Panel Monitor	EE191AA#XXX
	HP L919g 19" GSA Flat Panel Monitor	EE192AA#XXX
	<b>Options</b>	

### After-Market Options

HP Flat Panel Speaker Bar

EE418AA

HP CRT Monitor Multimedia Base

PM552AA

*\*This is only representative, not an exhaustive list.*

### Memory

#### DDR SYNCH DRAM NON-ECC MEMORY

The Intel G31 Express chipset supports non-ECC DDR2 memory up to PC2-6400 (800-MHz). Memory upgrades are accomplished by adding single or dual DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations.

**CAUTION:** You must shut down the computer **and disconnect the power cord** before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

**HP recommends dual-channel symmetric configurations for maximum performance.**

For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

#### STANDARD MEMORY

512-MB, 1-GB, 2-GB, or 4-GB DDR2 SYNCH DRAM

#### OPTIONAL MEMORY UPGRADES


Supports up to 4 GB of DDR2 SYNCH DRAM. Not all memory configurations possible are represented below.

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

DIMM Size	Slot 1	Slot 2
512-MB	512-MB	
1-GB	1-GB	
2-GB (dual-channel symmetric)	1-GB	1-GB
4-GB (dual-channel symmetric)	2-GB	2-GB



Storage

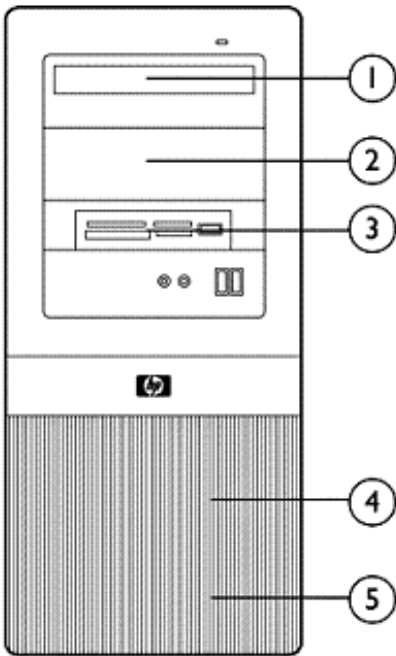

HP Compaq dx2390 Microtower Business PC

	Maximum Quantity Supported	Position Supported	Controller
<b>Drive Support</b>			
Diskette Drives	1	3	SIO
Media Reader	1	3	Internal USB 2.0 port
DVD-ROM Drives	2	1, 2	SATA
CD-RW/Combo Drives	2	1, 2	SATA
SuperMulti LightScribe DVD Writer Drives	2	1, 2	SATA
3.5" Serial ATA Hard Drives	2	4,5	SATA

Technical Specifications - Audio

Integrated Realtek ALC662 Audio	Type	Integrated
	HD Audio compatible codec	Yes 5:1 channel
	Sampling	Supports 48/96 KHz
	Audio Jacks	Mic-In
		Line-In
		Line-Out / Headphone Out
	Power Support	Digital: 3.3V Analog: 5V
	Other	Meets performance requirements for audio on PC99/2001 systems High-performance DACs with 97dB SNR(A-Weighting) ADCs with 90dB NR(A-Weighting)



### Technical Specifications - Communications

#### Integrated Realtek 8101E-GR 10/100 Fast Ethernet Controller

<b>Controller</b>	8101E-GR
<b>Memory</b>	N/A
<b>Data rates supported</b>	2.5GHz data rate with X1 link width
<b>Compliance</b>	IEEE802.3, IEEE 802.3u, IEEE 802.3ab
<b>Bus architecture</b>	PClexpress 1.1
<b>Data transfer mode</b>	Half/Full Duplex Operation
<b>Hardware certifications</b>	MS NDIS5, IPv4, IPv6, TCP, UDP
<b>Power requirement</b>	100mbps (heavy traffic) TBD mW max. 10mbps (heavy traffic) TBD mW max. S3 with Link TBD mW Link Down @S0 TBD mW Link Down @S3/S5 TBD mW
<b>Boot ROM support</b>	EEPROM, 1Kb, 2Kb
<b>Network transfer rate</b>	10/100Mbps over CAT.5 10Mbps over CAT.3
<b>Dimensions</b>	9mm x 9mm
<b>Management capabilities</b>	ACPI rev 2.0, PM rev 1.1, ASPM v1.0a

#### Intel Gigabit CT Desktop NIC

<b>Connector</b>	RJ-45
<b>Controller</b>	Intel WG82574L Gigabit Ethernet Controller
<b>Memory</b>	Integrated Dual 48K configurable transmit receive FIFO Buffers
<b>Data rates supported</b>	10/100/1000 Mbps
<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
<b>Bus architecture</b>	PCI-E 1.0a
<b>Data path width</b>	X1, 250 MB/s, Bi-directional interface
<b>Data transfer mode</b>	Bus-master DMA
<b>Hardware certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
<b>Power requirement</b>	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
<b>Boot ROM support</b>	Yes
<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps

### Technical Specifications - Communications

<b>Environmental</b>	<b>Operating temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating humidity</b>	85% at 131° F (55° C)
<b>Dimensions</b>	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)	
<b>Operating system driver support</b>	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*. No driver is required for this device. Native support is provided by the operating system. Red Hat Linux 7.2, Linux 7.3 and Red Hat Enterprise Linux 3	
	<p>* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a>. For Windows Vista system requirements, visit: <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a>.</p>	
<b>Management capabilities</b>	WOL , PXE, DMI, WFM 2.0	

<b>Intel PRO/1000 PT Gigabit PCIe Controller</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel 82572EI Gigabit Ethernet Controller
	<b>Memory</b>	Integrated Dual 48K configurable transmit receive FIFO Buffers
	<b>Data rates supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus architecture</b>	PCI Express 1.0a
	<b>Data transfer mode</b>	Bus-master DMA
	<b>Hardware certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	<b>Power requirement</b>	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	<b>Boot ROM support</b>	Yes
	<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
<b>Environmental</b>	<b>Operating temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating humidity</b>	85% at 131° F (55° C)
<b>Dimensions</b>	6.4 x 2.6 x 0.8 in (16.3 x 6.6 x 1.9 cm)	
<b>Management capabilities</b>	ASF, WOL, PXE, DMI, WFM 2.0. (Wake-on-LAN supported from S1, S3, S4 only. Not supported from S5)	

### Technical Specifications - Communications

HP Wireless A+G PCI	Dimensions	4.99 x 2.54 x 0.71 in (126.8 x 64.4 x 18.0 mm)	
	Weight	0.268 lb (65 g)	
	Controller	Atheros AR5414X chipset	
	system interface	PCI Spec 2.2	
	Network standard	IEEE 802.11a/b/g	
	Frequency band	5.1500 to 5.8500 GHz	
		2.4000 to 2.4835 GHz	
		2.4465 to 2.4835 GHz (Europe, Middle East, Asia and Asia Pacific – excluding Japan)	
		2.4000 to 2.4697 GHz (Japan)	
	Operating Temperature	32° to 140° F (0° to 60° C), operating	
	Storage temperature	-4° to 176° F (-20° to 80° C), non-operating	
	Humidity	10% to 85% non-condensing	
	Operating voltage	5V ± 5%	
	Power consumption	Tx/Rx peak 560/250mA @ 3.3V (max.)	
	Output power (approximately)	15 dBm ±2dB	
	Receive sensitivity	-90dBm at 11 Mbps (typical)	
	Data transfer rate	Standard rates of 1, 2, 5.5, 11, 6, 9, 12, 18, 24, 48, 54 and Super AG Mode108-Mbps	
	Spreading	DSSS (Direct Sequence Spread Spectrum)	
	Security	64(40h) bit, 128(104h) bit, WPA, IEEE802.1X, AES-OCB, AES-CCM, Microsoft PEAP,TKIP, WEP	
	Antenna	External 5dBi antenna	
Throughput	108 Mbps (only with Belkin 54G or above router that supports 108 Mbps speed)	200 ft (60.96 m) – Indoor	
	54 Mbps	200 ft (60.96 m) – Indoor	
	11 Mbps	200 ft (60.96 m) – Indoor	
Certifications	Wi-Fi certified		
Certifications for use by country	North America: United States, Canada		
	Europe: Austria, Belgium, Cyprus, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Liechtenstein, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom		
	Australia, New Zealand		

<b>HP Wireless 802.11b/g/n PCIe</b>	<b>Dimensions (L x H)</b>	3.3 x 4.7 inches (8.5 x 12 cm)
	<b>Weight</b>	0.08 pounds (40 g)
	<b>Controller</b>	Ralink RT2790
	<b>System interface</b>	PCIExpress x1
	<b>Network standard</b>	802.11 b/g/n

### Technical Specifications - Communications

<b>Frequency band</b>	2.400 - 2.497 GHz		
<b>Operating temperature</b>	14° to 149°F, operating (-10° to 65°C, operating)		
<b>Storage temperature</b>	-40° to 176°F, non-operating (-40° to 80°C, non-operating)		
<b>Humidity</b>	10-90% operating 5-95% non-operating		
<b>Operating voltage</b>	3.3V +/- 9% 12V +/- 8%		
<b>Power consumption</b>	Platform/WLAN Mode	Power Consumption	
	Maximum Power Consumption	10 Watts	
	Transmit Only	4 Watts maximum averaged power over 1 second	
	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer	
	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second	
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second	
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second	
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second	
<b>Output power (approximately)</b>	<b>802.11b modes</b>	<b>802.11g modes</b>	<b>EWC modes</b>
	+19 dBm +/- 1.0 dB maximum	+17 dBm +/- 1.0 dB maximum	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)
<b>Receive sensitivity</b>	<b>Mode</b>	<b>Data rate</b>	<b>Sensitivity</b>
	802.11b	1 Mbps	-94 dBm
	802.11b	11 Mbps	-85 dBm
	802.11g	6 Mbps	-91 dBm
	802.11g	18 Mbps	-85 dBm
	802.11g	48 Mbps	-75 dBm
	802.11g	54 Mbps	-72 dBm
	EWC (2.4 GHz)	6.5 Mbps	-87 dBm
	EWC (2.4 GHz)	54 Mbps	-82 dBm
	EWC (2.4 GHz)	81 Mbps	-78 dBm
	EWC (2.4 GHz)	162 Mbps	-74 dBm
	EWC (2.4 GHz)	270 Mbps	-68 dBm
	EWC (2.4 GHz)	300 Mbps	-64 dBm
<b>Data transfer rate</b>	<b>Data Rate (MCS)</b>	<b>Minimum Throughput</b>	
	1 Mbps (802.11 b)	700 kbps	

### Technical Specifications - Communications

2 Mbps (802.11 b)	1.4 Mbps
5.5 Mbps (802.11 b)	3.5 Mbps
11 Mbps (802.11 b)	5.9 Mbps
12 Mbps (802.11 g)	6 Mbps
18 Mbps (802.11 g)	9 Mbps
24 Mbps (802.11 g)	12 Mbps
36 Mbps (802.11 g)	18 Mbps
48 Mbps (802.11 g)	21 Mbps
54 Mbps (802.11 g)	22.5 Mbps
6.5 Mbps (20 MHz EWC)	4.5 Mbps
13 Mbps (20 MHz EWC)	9 Mbps
19.5 Mbps (20 MHz EWC)	13.5 Mbps
26 Mbps (20 MHz EWC)	18 Mbps
39 Mbps (20 MHz EWC)	27 Mbps
52 Mbps (20 MHz EWC)	36 Mbps
58.5 Mbps (20 MHz EWC)	40 Mbps
65 Mbps (20 MHz EWC)	45 Mbps
78 Mbps (20 MHz EWC)	54 Mbps
104 Mbps (20 MHz EWC)	72 Mbps
117 Mbps (20 MHz EWC)	81 Mbps
130 Mbps (20 MHz EWC)	91 Mbps
13.5 Mbps (40 MHz EWC)	8 Mbps
27 Mbps (40 MHz EWC)	16 Mbps
40.5 Mbps (40 MHz EWC)	24 Mbps
54 Mbps (40 MHz EWC)	32 Mbps
81 Mbps (40 MHz EWC)	48 Mbps
108 Mbps (40 MHz EWC)	64 Mbps
121.5 Mbps (40 MHz EWC)	72 Mbps
135 Mbps (40 MHz EWC)	81 Mbps

#### Security

- IEEE and WiFi compliant 64 / 128 bit WEP encryption
- AES: CCM
- 802.1x authentication
- WPA: 802.1x. WPA-PSK and TKIP
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through V5

#### Antenna

HP part number 497792-001

#### Certifications

Wi-Fi certified

#### Certifications for use by country

United States, Canada, Peru, Taiwan

### Technical Specifications - Communications

<b>Agere 56K PCI Modem</b>	<b>Data Transmission</b>	56,000 Kbps maximum downstream data <b>NOTE:</b> 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
	<b>Data Speeds</b>	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
	<b>Data Standards</b>	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	<b>Fax Speeds</b>	14,400/12,000/9,600/7,200/4,800/2,400/300 b/s
	<b>Fax Mode Capabilities</b>	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
	<b>Error Correction and Data Compression</b>	V.44, 42bis, V.42 and MNP2-5
	<b>Power Management</b>	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
	<b>Upgradeability</b>	Driver upgradeable for future enhancements
	<b>Video</b>	ITU-T V.80 video ready interface
	<b>Other</b>	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
	<b>Operating Humidity</b>	20% to 90%, non-condensing
	<b>Power</b>	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
	<b>Chipset</b>	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
	<b>Dimensions (L X H)</b>	Complies with PCI low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
	<b>Connection</b>	Single RJ-11 connector
	<b>Other Features</b>	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
	<b>Safety</b>	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
	<b>EMC</b>	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
	<b>Telecom</b>	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
	<b>Health</b>	Bare PCB material compliant to 94V-0 or better (marked as such)
	<b>Other</b>	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant



### Technical Specifications - Communications

**LSI PCIe x1 56K  
International SoftModem**

**Data Transmission**

Technology speeds: 56,000 Kbps maximum downstream data, controllerless

**NOTE:** 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.

**Data Speeds**

(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/  
16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300

**Data Standards**

ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103

**Fax Speeds**

14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s

**Fax Mode Capabilities**

ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2

**Error Correction and Data  
Compression**

V.44, 42bis, V.42 and MNP2-5

**Power Management**

PCI Bus Power Management Interface Specification (PCI-PM) Revision 1.2, Appendix A. D0, D3hot, and D3cold. Wake on Ring state when in D3cold. If the power management event (PME) feature is enabled in D3cold, a modem can wake the system via WAKE# (WAKEN) or beacon. Meets PCI Express 1.1 standard.

**Upgradeability**

Driver upgradeable for future enhancements

**Video**

ITU-T V.80 video ready interface

**Other**

TIA/EIA 602 standard AT command set

Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface

Optional ring wakeup signal

**Operating Temperature**

32° to 158° F (0° to 70° C)

**Operating Humidity**

20% to 90%, non-condensing

**Power**

Requires a 3.3-V auxiliary power rail on PCI express bus

Uses only one PCI express load (i.e., one grant/request pair), one shared IRQ, one electrical load

**Chipset**

LSI SV92EX – Integrated PCI interface with 3.3-V tolerant buffers and CardBus support

**Dimensions (L X H)**

Complies with PCI express low profile specifications—6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets

**Connection**

Single RJ-11 connector

**Other Features**

Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support

**Safety**

UL recognized to UL 1950, 3<sup>rd</sup> edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark

**EMC**

FCC Part 15, IC ES003, EN 55022, 3<sup>rd</sup> edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8

**Telecom**

FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals  
Not available in Korea or the Republic of South Africa.

**Other**

The SV92EX device is packaged in a 32-pin micro leadless chip carrier (MLCC). The SV92EX is fully compliant with the PCI Express revision 1.1 specification. WHQL approved; ASPM compliant.

### Technical Specifications - Graphics

<b>Integrated Graphics Media Accelerator</b>	<b>3D/2D Controller</b>	Microsoft DirectX® 9 based with support for Pixel Shader 2.0, 4:1 anisotropic filtering, Gaussian texture filtering, shadow maps, volumetric textures, double-sided stencil buffers, and 4 pixel pipes.
	<b>VGA Controller</b>	Integrated
	<b>Bus Type</b>	PCI Express™ x16 (If an external graphics card is installed in a PCI slot, the internal graphics can be enabled or disabled using the system's BIOS setup utility. If an external graphics card is installed in the PCI Express™ slot, the internal graphics cannot be enabled).
	<b>RAMDAC</b>	Integrated, 350 MHz
	<b>Memory</b>	Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed and system load. 8 MB is pre-allocated for graphics use at system boot time. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
		<b>System memory equal or greater than 512 MB</b> 8 MB pre-allocated + 248 MB DVMT = max frame buffer of 256 MB
	<b>Controller Clock Speed</b>	250 MHz
	<b>Overlay Planes</b>	Single overlay support with 5x3 filtering
	<b>Maximum Color Depth</b>	32 bits/pixel
	<b>Maximum Vertical Refresh Rate</b>	75 Hz at up to 2048 x 1536 analog, 60 Hz at up to 1920 x 1200 for flat panel, 85 Hz at up to 1400 x 1050 for digital CRT/HDTV. Varies with mode and configuration. See table below.
	<b>Multi-display Support</b>	Support for one CRT via the motherboard's VGA connector. Support for an additional DVI-D display via the optional DVI ADD2 card. Dual independent displays and dual synchronous (Twin or Clone mode) displays are supported.
	<b>Graphics/Video API Support</b>	Microsoft DirectX®9, DirectXVA®, VMR9, GDI/GDI+; OpenGL® 1.4.

Resolutions Supported <sup>1</sup>	Resolution	Maximum Refresh Rate (Hz)		
		Analog Monitor	Digital Monitor	
			Flat Panel	CRT / HDTV
	640 x 480	75	60	85
	800 x 600	75	60	85
	1024 x 768	75	60	85
	1280 x 1024	75	60	85
	1400 x 1050	75	60	85
	1600 x 1200	75	60	N/A
	1920 x 1080	75	60	N/A
	1920 x 1200	75	60	N/A
	1920 x 1440	75	N/A	N/A
	2048 x 1536	75	N/A	N/A

### Technical Specifications - Graphics

1 Modes listed are supported with a single active display. The supported mode list for multiple active displays is a subset of this list. Not all modes will support video playback and some supported modes may use software MC (motion compensation) rather than hardware MC. Not all modes will support 3D acceleration depending on the system configuration (e.g., resolution selected, size of frame buffer, number of installed memory modules, etc.).

**NOTE:** Other resolutions and refresh rates may be selectable but are not recommended.

NVIDIA GeForce 8400 GS (256 MB SH) PCIe x16 Graphics Controller	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2048 x 1536 (analog), 2560 x 1600 (digital)	
	Input/Output connectors	DVI-I (DVI port supports dual-link and HDCP) TV-out (4 pin S-video)	
	Board display options	DVI-I + TV DVI-I supports analog CRT or flat panel or digital flat panel (using DVI-A, DVI-D or DVI-I connector) DVI-I supports analog CRT or flat panel (with VGA connector and DVI-I to VGA dongle) TV connector is a 4-pin mini-DIN S-video connector	
	Board configuration	Specification	Description
		Graphics Chip	NVIDIA GeForce 8400 GS
		Core clock	460 MHz
		Memory clock	200 MHz
	Frame buffer	256 MB DDR2	
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish		
Core power	25 W (Max board power)		

#### NVIDIA GeForce 8400 GS (256 MB SH) PCIe x16 Graphics Controller display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

### Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

#### NVIDIA GeForce GT130 768MB PCIe x16 Graphics Card

<b>Bus type</b>	PCI Express (x16 lanes)	
<b>Input/Output connectors</b>	DVI-I (DVI port supports dual-link and HDCP) VGA and HDMI	
<b>Board display options</b>	Supports two displays through any combination of two of the three output ports.	
<b>Board configuration</b>	<b>Specification</b>	<b>Description</b>
	Graphics Chip	NVIDIA GeForce GT130
	Core clock	550 MHz
	Memory clock	500 MHz
	Frame buffer	768MB DDR2
<b>Maximum vertical refresh rate</b>	85 Hz	
<b>Display support</b>	Integrated 400 MHz RAMDAC	
<b>Display max resolution</b>	2048 x 1536 (analog), 2560x1600 (digital)	

#### NVIDIA GeForce GT130 768MB PCIe x16 Graphics Controller display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

### Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R*
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60**

\* Max HDMI resolution is 1080p

\*\* Only supported when using a dual-link DVI connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

**Languages supported** 24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish

**Operating systems support** Windows Vista Home Basic 32\*  
FreeDOS  
Linux® x86 and x86\_64 distributions using XFree86® or X.Org\*\*

\* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

\*\* Linux drivers are available from NVIDIA's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website (<http://www.hp.com/wwwolutions/linux/products/clients/>) for support information.

**Maximum power** 70W

**Option kit contents**

- NVIDIA GeForce GT130 768MB PCIe x16 Graphics Card
- Software CD with graphics drivers
- Warranty documentation

**Compliance standards** EMC Emissions:  
a. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

EMC Immunity:  
CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

### Technical Specifications - Graphics

#### HP ADD2 SDVO PCIe x16 DVI-D Adapter

<b>Models</b>	HP ADD2 SDVO DVI-D Out Adapter
<b>Form Factor</b>	Low-profile card
<b>DVI-D Connector</b>	Digital connection only
<b>Dual Head Support</b>	Yes, when used with the integrated VGA connector
<b>Display Devices Supported</b>	HP L1740 HP L1940T HP L2045W HP LP1965

**NOTE:** These graphics adapters offer optimal performance with any display that meets applicable VESA standards.

<b>Color Depth</b>	All modes support 8-bpp, 16-bpp, and 24-bpp color depths
<b>Host Interface Connector</b>	Mechanically compliant with PCI-E standard Complies with the Intel ADD2 and Intel Serial Digital Video Output (SDVO) specifications
<b>Dot Clock</b>	165 MHz maximum
<b>Display Modes</b>	Supports display modes that require up to 165-MHz bandwidth on the link, as shown in the following table.

Resolution		60-Hz LCD	60-Hz	75-Hz	85-Hz
Blanking		5% reduced	GTF	GTF	GTF
640 x 480	VGA	Yes	Yes	Yes	Yes
800 x 600	SVGA	Yes	Yes	Yes	Yes
1024 x 768	XGA	Yes	Yes	Yes	Yes
1280 x 1024	SXGA	Yes	Yes	No	No
1600 x 1200	UXGA	Yes	Yes	No	No

#### HP DisplayPort to VGA Adapter

<b>Connectors</b>	DisplayPort and VGA connector
<b>Adapter length</b>	8 in (20 cm)
<b>Adapter weight</b>	.1 lbs (.06 kg)
<b>Option kit contents</b>	HP DisplayPort to VGA Adapter, documentation
<b>Maximum vertical refresh rate</b>	85 Hz
<b>Display support</b>	162 MHz RAMDAC
<b>Display max resolution</b>	1600x1200

### Technical Specifications - Graphics

#### HP DisplayPort to VGA adapter display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP. Using the HP DisplayPort to VGA Adapter may require an update to the graphics driver installed on your system. To install the most up-to-date graphics driver go to: [www.hp.com](http://www.hp.com).

Resolution	Max refresh rate
640x480	85
800x600	85
1024x768	85
1280x720	85
1280x1024	85
1440x900	75
1600x1200	60
1680x1050	60
1920x1080	60-R
1920x1200	60-R

**NOTE:** 60-R denotes reduced blanking timings are used. Not all monitors support reduced blanking timing.

<b>ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card</b>	<b>Bus type</b>	PCI Express (x16 lanes)	
	<b>Maximum vertical refresh rate</b>	85 Hz	
	<b>Display support</b>	Integrated 400 MHz RAMDAC	
	<b>Display max resolution</b>	2560 x 1600 digital, 2048 x 1536 analog	
	<b>Board display options</b>	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output	
	<b>Board configuration</b>	<b>Specification</b>	<b>Description</b>
		Graphics Chip	RV610
		Core clock	650 MHz
		Memory clock	500 MHz
		Frame buffer	256 MB DDR2, 128 bit wide
	<b>Languages supported</b>	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
	<b>Core power</b>	21 W	
	<b>Compliance standards</b>	EMC Emissions: a) FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use b) CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c) Canadian Standard ICES-003 is equivalent to CISPR22 d) Taiwanese Standard BSMI e) Japanese VCCI	

### Technical Specifications - Graphics

f) Australian C-Tick

g) Korean (MIC)

EMC Immunity:

CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement.

#### ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

ATI Radeon HD 3470 (256MB SH) PCIe x16 Graphics Card	<b>Bus type</b>	ATI Radeon HD 3470 (256MB SH) PCIe x16 Graphics Card	
	<b>Maximum vertical refresh rate</b>	85 Hz	
	<b>Display support</b>	Integrated 400 MHz RAMDAC	
	<b>Display max resolution</b>	2560x1600 digital, 2048 x 1536 analog	
	<b>Board display options</b>	Supports two displays via the DisplayPort and DVI connectors	
	<b>Board configuration</b>	<b>Specification</b>	<b>Description</b>
		Graphics Chip	RV620
		Core clock	750 MHz
		Memory clock	500 MHz
		Frame buffer	256 MB DDR2, 64 bit wide
	<b>Languages supported</b>	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
	<b>Operating systems support</b>	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*.	

\* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista



### Technical Specifications - Graphics

will run on your computer. To download the tool, visit:  
<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86\_64 distributions using XFree86 or X.Org\*\*.

\*\* Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website:  
<http://www.hp.com/wwwolutions/linux/products/clients/> for support information.

<b>Core power</b>	22 W (max)
<b>Dimensions (H x D)</b>	2.71 in x 6.60 in (68.90 mm x 167.65 mm)
<b>Weight</b>	0.30 lb (134.3 g)
<b>Option kit contents</b>	<ul style="list-style-type: none"><li>• ATI Radeon HD 3470 (256MB SH) PCIe x16 Graphics Card with full height bracket attached</li><li>• DVI to VGA adapter</li><li>• Software CD with graphics drivers</li><li>• Low profile bracket to convert the card for using in a low profile chassis</li><li>• Warranty documentation</li></ul>
<b>Compliance standards</b>	<p><u>EMC Emissions:</u></p> <ul style="list-style-type: none"><li>a) FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home &amp; Office Use</li><li>b) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment</li><li>c) Canadian Standard ICES-003 is equivalent to CISPR22</li><li>d) Taiwanese Standard BSMI</li><li>e) Japanese VCCI</li><li>f) Australian C-Tick</li><li>g) Korean (MIC)</li></ul> <p><u>EMC Immunity:</u></p> <p>CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.</p>

#### **ATI Radeon HD 3470 (256MB SH) PCIe x16 Graphics Card display resolutions and refresh rates**

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

### Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DisplayPort connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

#### ATI Radeon HD 4550 DH PCIe x16 Graphics Card

#### Input/Output connectors

DMS-59  
S-video connector

#### Board display options

Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output

#### Board configuration

#### Specification

#### Description

Graphics Chip

RV710

Core clock

600 MHz

Memory clock

800 MHz

Frame buffer

256 MB DDR2, 64 bit wide

#### Bus type

PCI Express (x16 lanes)

#### Maximum vertical refresh rate

85 Hz

#### Display support

Integrated 400 MHz RAMDAC

#### Display max resolution

1900 x 1200 digital, 2048 x 1536 analog

#### ATI Radeon HD 4550 DH PCIe x16 Graphics Card display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

### Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

#### Languages supported

24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish

#### Operating systems support

Windows Vista Business 64\*, Windows Vista Business 32\*, Windows Vista Home Basic 32\*, Windows XP Professional or Windows XP Home 32\*.

\* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86\_64 distributions using XFree86 or X.Org\*\*.

\*\* Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwwsolutions/linux/products/clients/> for support information.

#### Core power

21 W

#### Option kit contents

- ATI Radeon HD 4550 DH PCIe x16 Graphics Card with full height bracket attached
- DMS 59 to dual VGA Y cable
- Software CD with graphics drivers
- Low profile bracket to convert the card for using in a low profile chassis
- Warranty documentation

#### Compliance standards

EMC Emissions:

- FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use
- CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment
- Canadian Standard ICES-003 is equivalent to CISPR22
- Taiwanese Standard BSMI
- Japanese VCCI
- Australian C-Tick

### Technical Specifications - Graphics

g) Korean (KCC)

EMC Immunity:

CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement.

<b>ATI Radeon HD 4650 1GB PCIe x16 Graphics Card</b>	<b>Bus type</b>	PCI Express (x16 lanes)
	<b>Maximum vertical refresh rate</b>	85 Hz
	<b>Display support</b>	Integrated 400 MHz RAMDAC
	<b>Display max resolution</b>	2560 x 1600 digital, 2048 x 1536 analog

**ATI Radeon HD 4650 1 GB PCIe x16 Graphics Card display resolutions and refresh rates**

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R*
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60**

\* Max HDMI resolution is 1080p

\*\* Only supported when using a dual-link DVI connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

<b>Board display options</b>	Supports two displays through any combination of two of the three output ports.	
<b>Board configuration</b>	<b>Specification</b>	<b>Description</b>
	Graphics Chip	RV730Pro
	Core clock	600MHz
	Memory clock	500 MHz
	Frame buffer	1 GB DDR2, 128 bit wide
<b>Maximum power</b>	55 W	
<b>Languages supported</b>	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
<b>Operating systems support</b>	Windows Vista Home Basic 32*, FreeDOS	

\* Certain Windows Vista product features require advanced or additional hardware.

### Technical Specifications - Graphics

Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86\_64 distributions using XFree86 or X.Org\*\*

\*\* Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwwsolutions/linux/products/clients/> for support information.

#### Option kit contents

- ATI Radeon HD 4650 512MB PCIe x16 Graphics Card
- Software CD with graphics drivers
- Warranty documentation

#### Compliance standards

##### EMC Emissions:

a) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

##### EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

### Technical Specifications - Input Devices

HP PS/2 or USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)	
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)	
	Electrical	Weight	2 lb (0.9 kg) minimum	
		Operating voltage	+ 5VDC ± 5%	
		Power consumption	50-mA maximum (with three LEDs ON)	
		ESD	CE level 4, 15-kV air discharge	
		EMI – RFI	Conforms to FCC rules for a Class B computing device	
		Mechanical	MicrosoftPC 99 – 2001	Functionally compliant
			Languages	38 available
	Keycaps		Low-profile design	
	Switch actuation		55-g nominal peak force with tactile feedback	
	Switch life		20 million keystrokes (using Hasco modified tester)	
	Switch type		Contamination-resistant switch membrane	
	Key-leveling mechanisms		For all double-wide and greater-length keys	
	Environmental	Cable length	6 ft (1.8 m)	
		Microsoft PC 99 – 2001	Mechanically compliant	
		Acoustics	43-dBA maximum sound pressure level	
		Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	-22° to 140° F (-30° to 60° C)	
		Operating humidity	10% to 90% (non-condensing at ambient)	
		Non-operating humidity	20% to 80% (non-condensing at ambient)	
		Operating shock	40 g, six surfaces	
		Non-operating shock	80 g, six surfaces	
		Operating vibration	2-g peak acceleration	
		Non-operating vibration	4-g peak acceleration	
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
		Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS			

HP USB Smartcard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/Silver
		Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)

### Technical Specifications - Input Devices

<b>Electrical</b>	<b>Weight</b>	2 lb (0.9 kg) minimum
	<b>Operating voltage</b>	+ 5VDC $\pm$ 5%
	<b>Power consumption</b>	100-mA maximum (with four LEDs ON)
	<b>System interface</b>	USB Type A plug connector
	<b>ESD</b>	CE level 4, 15-kV air discharge
	<b>EMI - RFI</b>	Conforms to FCC rules for a Class B computing device
<b>Mechanical</b>	<b>Microsoft PC 99 - 2001</b>	Functionally compliant
	<b>Languages</b>	30+ available
	<b>Keycaps</b>	Low-profile design
	<b>Switch actuation</b>	55 g nominal peak force with tactile feedback
	<b>Switch life</b>	20 million keystrokes (using Hasco modified tester)
	<b>Switch type</b>	Contamination-resistant membrane
<b>Environmental</b>	<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
	<b>Cable length</b>	6 ft (1.8 m)
	<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
	<b>Acoustics</b>	43-dBA maximum sound pressure level
	<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
	<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
	<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)
	<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
	<b>Operating shock</b>	40 g, six surfaces
	<b>Non-operating shock</b>	80 g, six surfaces
	<b>Operating vibration</b>	2-g peak acceleration
	<b>Non-operating vibration</b>	4-g peak acceleration
	<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
	<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence
<b>Approvals</b>	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF, FIPS 201	
<b>SMARTCARD function</b>	<b>Support</b>	All ISO 7816 smart cards
	<b>Interface</b>	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	<b>Chipset</b>	SCM STCII
	<b>Standard APIs supported</b>	PC/SC, EMV2000, SET

### Technical Specifications - Input Devices

<b>Power</b>	USB Port	
	Short circuit detection (protects smart card and reader)	
<b>Power consumption</b>	Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
	Supports 3-V and 5-V cards	
<b>Communication</b>	<b>From card</b>	Programmable from 9,600 baud to 115,200 baud
	<b>From computer</b>	Up to 38,400 baud
<b>Landing mechanism</b>	<b>Contact device</b>	Friction contact
	<b>Card insertions rating</b>	Up to 100,000 insertion cycles
<b>Interface modes</b>	USB communications through USB port	
	SCM protocol	
<b>Reader performance interface</b>	Automatic card insertion/removal detection	
	USB connection	
<b>Electro-magnetic standards</b>	<b>Europe</b>	89/336/CEE guideline
	<b>USA</b>	USAFCC part 15

<b>HP USB 2-Button Laser</b>	<b>Scroll Wheel</b>	24
	<b>Maximum Rotation Speed</b>	48 rats/sec
	<b>Switch Type</b>	wheel
	<b>Switch Life</b>	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times
<b>Environmental</b>	<b>Operating Temperature</b>	32° to 104° F (0° to 40° C)
	<b>Non-operating Temperature</b>	-4° to 140° F (-20° to 60° C)
	<b>Operating Humidity</b>	10% to 90% (non-condensing at ambient)
	<b>Non-operating Humidity</b>	20% to 80% (non-condensing at ambient)
	<b>Operating Shock</b>	40 g, six surfaces
	<b>Non-operating Shock</b>	80 g, six surfaces
	<b>Operating Vibration</b>	2-g peak acceleration
	<b>Non-operating Vibration</b>	4-g peak acceleration
<b>Electrical</b>	<b>Operating Voltage</b>	+ 5VDC ± 5%
	<b>Power Consumption</b>	
	<b>MTBF</b>	> 150,000 hrs



### Technical Specifications - Input Devices

<b>Mechanical</b>	<b>ESD</b>	IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV
	<b>EMI-RFI</b>	FCC Class B
	<b>PC98</b>	PC 99 Compliant
	<b>Resolution</b>	800dpi
	<b>Tracking Speed</b>	25 cm/sec
	<b>Acceleration</b>	0.5mm
	<b>Switch Actuation</b>	0.6N (60gf)
	<b>Switch Life</b>	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times
	<b>Cable Length</b>	1850mm
	<b>PC98-99</b>	PC99 compliant
<b>Regulatory Approvals</b>	UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL	

HP PS/2 Optical Scroll Mouse	Dimensions (H x L x W)	3.95 x 6.21 x 11.7 cm (1.56 x 2.44 x 4.61 in)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
		Non-operating temperature	-4° to 140°F ( -20° to 60° C)
		Operating humidity	10% to 90% (non condensing at ambient)
		Non-operating humidity	10% to 90% non condensing
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
		Electrical	Operating voltage
	Power consumption		100mA
	System consumption		PS/2 mini-din connector
	ESD		CE level 4, 15 kV air discharge
	EMI-RFI		Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC99 – 2001	Functionally compliant
		Resolution	400 ± 20% DPI
		Tracking speed	10 in/s (25.4 cm/s) maximum
		Acceleration	100 in/s/s (2.54 m/s/s)

### Technical Specifications - Input Devices

<b>Scroll wheel</b>	<b>Switch actuation</b>	61 g nominal peak force
	<b>Switch life</b>	3,000,000 operations (using Hasco modified tester)
	<b>Switch type</b>	Low force micro-switches
	<b>Tracking mechanism life</b>	155 mi (250 km) at average speed of 10 in/s
	<b>Cable length</b>	6 ft (1.8 m)
	<b>Microsoft PC99 – 2001</b>	Mechanically compliant
	<b>Width</b>	8 mm
	<b>Diameter</b>	1.01 in (25.6 mm)
	<b>Maximum rotation speed</b>	48 rats/sec
	<b>Switch type</b>	Light force micro-switch
<b>Regulatory approvals</b>	<b>Switch life</b>	1 million operations
	<b>Mechanical life</b>	Minimum 200,000 revolutions
	<b>Compliant</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

---

<b>HP USB Optical Scroll Mouse</b>	<b>Dimensions (H x L x W)</b>	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	<b>Weight</b>	0.27 lb (0.12 kg)
	<b>Cable length</b>	72.8 in (185 cm)

### Technical Specifications - Hard Drives

<b>Serial ATA Hard Drives</b> (7200 rpm)	<b>80 GB</b>	<b>Capacity</b>	80,026,361,856 bytes	
		<b>Height</b>	1 in (2.54 cm)	
		<b>Width</b>	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		<b>Interface</b>	Serial ATA (3.0 Gb/s)	
		<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
		<b>Buffer</b>	8 MB	
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
			<b>Average</b>	11 ms
			<b>Full-Stroke</b>	21 ms
		<b>Rotational Speed</b>	7,200 rpm	
		<b>Logical Blocks</b>	156,301,488	
		<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)	
	<b>160 GB</b>	<b>Capacity</b>	160,041,885,696 bytes	
		<b>Height</b>	1 in (2.54 cm)	
		<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		<b>Interface</b>	Serial ATA (3.0 Gb/s)	
		<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
		<b>Buffer</b>	8 MB	
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
			<b>Average</b>	11 ms
			<b>Full-Stroke</b>	21 ms
		<b>Rotational Speed</b>	7,200 rpm	
		<b>Logical Blocks</b>	312,581,808	
		<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)	
	<b>250 GB</b>	<b>Capacity</b>	250,059,350,016 bytes	
		<b>Height</b>	1 in (2.54 cm)	
		<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		<b>Interface</b>	Serial ATA (3.0 Gb/s)	
		<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
		<b>Buffer</b>	8 MB	

### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	488,397,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>320 GB</b>	<b>Capacity</b>	320,072,933,376 bytes	
	<b>Height</b>	1 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 3 Gb/s	
	<b>Buffer</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	625,142,448	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>500 GB</b>	<b>Capacity</b>	500,107,862,016 bytes	
	<b>Height</b>	1 in (2.54 cm)	
	<b>Width</b>	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate</b> (Maximum)	3.0 Gb/s	
	<b>Buffer</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	976,773,168	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### Technical Specifications - Optical Storage

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load			
	Orientation	Either horizontal or vertical			
	Interface type	SATA/ATAPI			
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)			
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)			
	Weight (max)	2.6 lb (1.2 kg)			
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X		
		DVD-ROM	Up to 16X		
		DVD-RAM	Up to 4X		
		CD-ROM, CD-R	Up to 48X		
		CD-RW	Up to 32X		
	Removable Storage - Media Compatibility - DVD-ROM	Media	Read	Write	
		CD-ROM	Yes	No	
		CD-R	Yes	No	
		CD-RW	Yes	No	
		DVD-ROM	Yes	No	
		DVD-ROM DL	Yes	No	
		DVD-RAM	Yes	No	
		DVD+R	Yes	No	
		DVD+R DL	Yes	No	
		DVD+RW	Yes	No	
		DVD-R	Yes	No	
		DVD-RW	Yes	No	
		DVD-R DL	Yes	No	
		Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
			Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
	Cache Buffer		2 MB (minimum)		
Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)				
Power	Source	SATA DC power receptacle			
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p			
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC -< 600 mA typical, < 1400 mA maximum			

### Technical Specifications - Optical Storage

<b>Environmental</b> <b>(all conditions</b> <b>non-condensing)</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b>	10% to 90%
	<b>Maximum Wet Bulb</b> <b>Temperature</b>	86° F (30° C)

#### SATA CD-RW/DVD-ROM Combo Drive

<b>Height</b>	5.25-inch, half-height, tray-load	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA/ATAPI	
<b>Disc capacity</b>	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
<b>Dimensions</b> (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
<b>Weight</b> (max)	2.6 lb (1.2 kg)	
<b>Write speeds</b>	<b>CD-R</b>	Up to 48X
	<b>CD-RW</b>	Up to 32X
<b>Read speeds</b>	<b>DVD+R/-R/+RW/ -RW/+R DL /-R DL</b>	Up to 8X
	<b>DVD-ROM</b>	Up to 16X
	<b>CD-ROM, CD-R</b>	Up to 48X
	<b>CD-RW</b>	Up to 32X
	<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)
<b>Access times</b> (typical reads, including setting)	<b>Full Stroke</b>	DVD: < 250 ms (typical), CD: < 210 ms (typical)
<b>Power</b>	<b>Source</b>	SATA DC power receptacle
	<b>DC Power Requirement</b>	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	<b>Temperature</b>	41° to 122° F (5° to 50° C)
<b>Environmental</b> <b>(all conditions</b> <b>non-condensing)</b>	<b>Relative Humidity</b>	10% to 90%
	<b>Maximum Wet Bulb</b> <b>Temperature</b>	86° F (30° C)

### Technical Specifications - Optical Storage

<b>HP SATA SuperMulti LightScribe DVD Writer Drive</b>	<b>Height</b>	5.25-inch, half-height, tray-load	
	<b>Orientation</b>	Either horizontal or vertical	
	<b>Interface type</b>	SATA/ATAPI	
	<b>Disc capacity</b>	8.5 GB DL or 4.7 GB standard	
	<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	<b>Weight (max)</b>	2.6 lb (1.2 kg)	
	<b>Write speeds</b>	<b>DVD-RAM</b>	Up to 12X
		<b>DVD+R</b>	Up to 16X
	<b>Read speeds</b>	<b>DVD+RW</b>	Up to 8X
		<b>DVD+R DL</b>	Up to 8X
		<b>DVD-R DL</b>	Up to 8X
		<b>DVD-R</b>	Up to 16X
		<b>DVD-RW</b>	Up to 6X
		<b>CD-R</b>	Up to 48X
		<b>CD-RW</b>	Up to 32X
		<b>DVD-RAM</b>	Up to 12X
		<b>DVD+R/-R/+RW/ -RW/+R DL/-R DL</b>	Up to 8X
		<b>DVD-ROM DL</b>	Up to 8X
	<b>Access times (typical reads, including setting)</b>	<b>DVD-ROM, DVD+R, DVD-R</b>	Up to 16X
		<b>CD-ROM, CD-R</b>	Up to 48X
		<b>CD-RW</b>	Up to 32X
		<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	<b>Power</b>	<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)
		<b>Source</b>	SATA DC power receptacle
	<b>Environmental (all conditions non-condensing)</b>	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
		<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
		<b>Temperature</b>	41° to 122° F (5° to 50° C)
		<b>Relative Humidity</b>	10% to 90%
		<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)

### Technical Specifications - Removable Storage

<b>1.44-MB Diskette Drive</b>	<b>Size</b>	3.5 in (8.89 cm)
	<b>LED Indicators</b> (front panel)	Green
	<b>Read/Write Capacity per Diskette</b> (high/low)	1.44 MB/720 KB
	<b>Drive Height</b>	One-third
	<b>Drive Rotation</b>	300 rpm
	<b>Transfer Rate</b> (high/low)	500/250 KB/s
	<b>Bytes/Sector</b>	512
	<b>Sectors/Track</b> (high/low)	18/9
	<b>Tracks/Side</b> (high/low)	80/80
	<b>Access Times</b>	<b>Track-to-Track</b> (high/low) 3/6 ms
		<b>Average</b> (high/low) 94/173 ms
		<b>Settling Time</b> 15 ms
		<b>Latency Average</b> 100 ms
	<b>Cylinders</b> (high/low)	80/80
	<b>Read/Write Heads</b>	Two
<hr/>		
<b>HP 16-in-1 Media Card Reader</b>	<b>USB interface</b>	USB 2.0 High-speed device via PCI card or pass-through via internal USB port of system board
	<b>Advance protocol support</b>	<ul style="list-style-type: none"> <li>• Supports hardware ECC (Error Correction Code) function</li> <li>• Supports hardware CRC (Cyclic Redundancy Check) function</li> <li>• Supports MS 4-bit parallel transfer mode</li> <li>• Supports MS-PRO 4-bit parallel transfer mode</li> <li>• Supports SD 4-bit parallel transfer mode</li> <li>• Supports high-speed 50 MHz SD 4-bit card (version 1.1)</li> <li>• Support high-speed 52 MHz MultiMediaCard 8-bit card (version 4.x)</li> </ul>
	<b>Supported media types</b>	<ul style="list-style-type: none"> <li>• Supports CompactFlash Card Type I (CF I), CompactFlash Card Type II (CF II), MicroDrive (MD)</li> <li>• Supports 3.3V SmartMedia Card (SM), SmartMedia ROM (SM ROM), Picture Card</li> <li>• Supports Secure Digital Card (SD), Secure Digital ROM Card (SD ROM), miniSD, MultiMediaCard, Secure MultiMediaCard (Secure MultiMediaCard), ROM Type MultiMediaCard (MultiMediaCard ROM), Reduced Size MultiMediaCard (RS MultiMediaCard), MultiMediaCard 4.0 (MultiMediaCard Plus), Reduced Size MultiMediaCard 4.0 (MultiMediaCard Mobile)</li> <li>• Support Memory Stick (MS), Memory Stick ROM (MS ROM), MagicGate Memory Stick (MG), Memory Stick Select, Memory Stick Duo (MS Duo), Memory Stick PRO (MS-PRO), Memory Stick PRO Duo (MS PRO Duo)</li> </ul>
	<b>Mechanical</b>	<b>Length</b> (3.5") 124.7 cm
		<b>Width</b> (3.5") 101.6 cm
		<b>Height</b> (3.5") 25.4 cm



### Technical Specifications - Removable Storage

<b>Environmental</b>	<b>Length (5.25")</b>	171.6 cm
	<b>Width (5.25")</b>	148.9 cm
	<b>Height (5.25")</b>	42.7 cm
	<b>Operational environmental extremes</b>	Test Parameters/Conditions – Power applied, unit operating on system $\pm 5\%$ nominal supply voltage. 10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours
<b>Approvals</b>	<b>Storage environmental extremes</b>	Test Parameters/Conditions 60°C @ 80% R.H. for 96 hours -30°C @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.2	
	FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T	

#### HP 22-in-1 Media Card Reader (with 1394 port)

<b>USB Interface</b>	USB 2.0 High-speed interface
	<b>NOTE:</b> Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.
<b>1394 Interface</b>	Two IEEE-1394a external ports; 1 IEEE-1394a internal port (connects to the pass through cable on the media card reader)
<b>Advance protocol support</b>	<ul style="list-style-type: none"> <li>• Supports hardware ECC (Error Correction Code) function</li> <li>• Supports hardware CRC (Cyclic Redundancy Check) function</li> <li>• Supports MS 4-bit parallel transfer mode</li> <li>• Supports MS-PRO 4-bit parallel transfer mode</li> <li>• Supports MS PRO-HG Duo 4-bit parallel transfer mode</li> <li>• Supports SD 4-bit parallel transfer mode</li> <li>• Supports high-speed 50Mhz SD 4-bit card (version 2.0)</li> <li>• Supports high-speed 52Mhz MultiMediaCard 8-bit card (version 4.2)</li> <li>• Supports CF v4.0 with PIO mode 6 and Ultra DMA mode</li> </ul>
<b>Supported media type</b>	<ul style="list-style-type: none"> <li>• CompactFlash Type I</li> <li>• CompactFlash Type II</li> <li>• Microdrive</li> <li>• MultiMediaCard</li> <li>• Reduced Size MultiMediaCard (RS MultiMediaCard)</li> <li>• MultiMediaCard 4.2 (MultiMediaCard Plus, including MultiMediaCard Plus HC)</li> <li>• Reduced Size MultiMediaCard 4.2 (MultiMediaCard Mobile, including MultiMediaCard Mobile HC)</li> <li>• Secure Digital Card (SD)</li> </ul>

### Technical Specifications - Removable Storage

<b>Supported media type with card adapter</b>	<ul style="list-style-type: none"> <li>• Secure Digital High Capacity (SDHC)</li> <li>• miniSD</li> <li>• miniSD High Capacity</li> <li>• Micro SD (T-Flash)</li> <li>• Micro SD HC</li> <li>• Memory Stick</li> <li>• Memory Stick Select</li> <li>• Memory Stick Duo (MS Duo)</li> <li>• Memory Stick PRO (MS PRO)</li> <li>• Memory Stick PRO Duo (MS PRO Duo)</li> <li>• Memory Stick PRO-HG Duo</li> <li>• MagicGate Memory Stick (MG)</li> <li>• MagicGate Memory Stick Duo</li> <li>• Picture Card</li> <li>• Memory Stick Micro (M2)</li> <li>• MultiMediaCard Micro</li> </ul>						
<b>Environmental</b>	<table> <tr> <td data-bbox="686 808 971 871"><b>Operational</b></td><td data-bbox="992 808 1531 1129">Test Parameters/Conditions - Power applied, unit operating on system <math>\pm 5\%</math> nominal supply voltage.</td></tr> <tr> <td data-bbox="686 844 971 871"><b>Environmental Extremes</b></td><td data-bbox="992 907 1531 1129">           10°C 10% R.H. = 24 hours            10°C 90% R.H. = 24 hours            20°C 90% R.H. = 24 hours            30°C 90% R.H. = 24 hours            40°C 90% R.H. = 24 hours            50°C 90% R.H. = 24 hours            50°C 10% R.H. = 24 hours         </td></tr> <tr> <td data-bbox="686 1144 971 1207">Storage Environmental Extremes</td><td data-bbox="992 1144 1531 1339">           Test Parameters/Conditions            140°F (60°C) @ 80% R.H. for 96 hours            -22°F (-30°C) @ 20% R.H. for 48 hours            No power applied            Delta °C &lt; 1.0°C/min            Delta % R.H. &lt; 1.5% R.H./min         </td></tr> </table>	<b>Operational</b>	Test Parameters/Conditions - Power applied, unit operating on system $\pm 5\%$ nominal supply voltage.	<b>Environmental Extremes</b>	10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours	Storage Environmental Extremes	Test Parameters/Conditions 140°F (60°C) @ 80% R.H. for 96 hours -22°F (-30°C) @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
<b>Operational</b>	Test Parameters/Conditions - Power applied, unit operating on system $\pm 5\%$ nominal supply voltage.						
<b>Environmental Extremes</b>	10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours						
Storage Environmental Extremes	Test Parameters/Conditions 140°F (60°C) @ 80% R.H. for 96 hours -22°F (-30°C) @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min						
<b>Approvals</b>	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3 FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T						

### Technical Specifications - Environmental Data

#### **Eco-Label Certifications & declarations**

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

#### **Hewlett-Packard Corporate Environmental Information**

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

---

© Copyright 2009 Hewlett-Packard Development Company, L.P.

All rights reserved.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.